


YLM 120 CELL

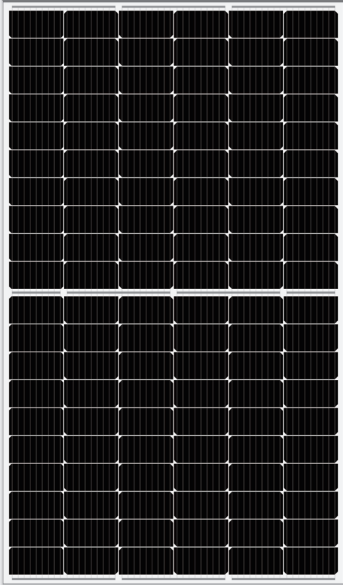


22.3%
CELL EFFICIENCY

12 YEAR
PRODUCT WARRANTY

0-5W
POWER TOLERANCE

25 Years Linear Warranty

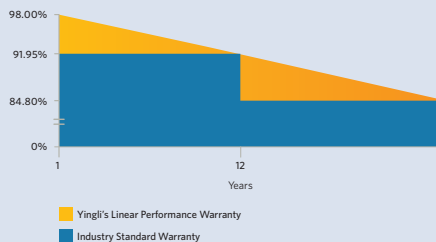

IMPROVED POWER NEVER SETTLE FOR LESS

Choosing the best P-type monocrystalline cells, YLM series modules are making the best out of your system. Trust in the expertise of Yingli and well proven technology.



Higher Durability

The multi-busbar design can decrease the risk of the cell micro-cracks and fingers broken.



High Power Density

High conversion efficiency and more power output per square meter, by lower series resistance and improved light harvesting.



Half-cell Design

Less energy loss caused by shading due to new cell string layout and split J-box, and lower cell connection power loss due to half-cell design.



Bigger Cells with better performance

A slight increase of the size of our cells, Boosts the performance of the newest modules by six percent on average.

Yingli Solar

Yingli Energy (China) Company Limited, known as "Yingli Solar", is one of the world's leading solar panel manufacturers with the mission to provide affordable green energy for all. Yingli Solar makes solar power possible for communities everywhere by using our global manufacturing and logistics expertise to address unique local challenges.

YLM 120 CELL

ELECTRICAL PERFORMANCE

Electrical parameters at Standard Test Conditions (STC)

Module type	YLxxxD-34d 1/2(XXX=Pmax) YLxxxD-34d 1500V 1/2(XXX=Pmax)					
Power output	P_{max}	W	365	370	375	380
Power output tolerances	ΔP_{max}	W	0 / + 5			
Module efficiency	η_m	%	20.04	20.31	20.59	20.86
Voltage at P_{max}	V_{mpp}	V	33.85	34.05	34.25	34.45
Current at P_{max}	I_{mpp}	A	10.79	10.87	10.95	11.04
Open-circuit voltage	V_{oc}	V	41.05	41.25	41.45	41.65
Short-circuit current	I_{sc}	A	11.27	11.35	11.43	11.51

STC: 1000W/m² irradiance, 25°C cell temperature, AM1.5g spectrum according to EN 60904-3.
Average relative efficiency reduction of 3.3% at 200W/m² according to EN 60904-1.

Electrical parameters at Nominal Operating Cell Temperature (NOCT)

Power output	P_{max}	W	270.4	274.1	277.8	281.5
Voltage at P_{max}	V_{mpp}	V	31.3	31.5	31.7	31.9
Current at P_{max}	I_{mpp}	A	8.63	8.70	8.76	8.83
Open-circuit voltage	V_{oc}	V	38.3	38.5	38.7	38.8
Short-circuit current	I_{sc}	A	9.12	9.19	9.25	9.32

NOCT: open-circuit module operation temperature at 800W/m² irradiance, 20°C ambient temperature, 1m/s wind speed.

THERMAL CHARACTERISTICS

Nominal operating cell temperature	NOCT	°C	45±2
Temperature coefficient of P_{max}	γ	%/°C	-0.37
Temperature coefficient of V_{oc}	β_{Voc}	%/°C	-0.29
Temperature coefficient of I_{sc}	α_{Isc}	%/°C	0.06

OPERATING CONDITIONS

Max. system voltage	1000V _{DC} /1500V _{DC}
Max. series fuse rating *	20A
Operating temperature range	-40°C to 85°C
Max. static load, front (e.g., snow)	5400Pa
Max. static load, back (e.g., wind)	2400Pa
Max. hailstone impact (diameter / velocity)	25mm / 23m/s

* DO NOT CONNECT FUSE IN COMBINER BOX WITH TWO OR MORE STRINGS IN PARALLEL CONNECTION

CONSTRUCTION MATERIALS

Front cover (material / thickness)	low-iron tempered glass / 3.2mm
Cell (quantity / material)	120 / monocrystalline silicon
Frame (material)	anodized aluminum alloy
Junction box (protection degree)	≥ IP67
Cable (length / cross-sectional area)	400(300)mm/ 4mm ²

• Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed.

• The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.

QUALIFICATIONS & CERTIFICATES

IEC 61215, IEC 61730, CE, ISO 9001:2015, ISO 14001:2015, BS OHSAS 18001:2007





GENERAL CHARACTERISTICS

Dimensions (L / W / H)	1755mm / 1038mm / 35mm
Weight	19.5kg


PACKAGING SPECIFICATIONS

Number of modules per pallet	30
Number of pallets per 40' container	26
Packaging box dimensions (L / W / H)	1795mm / 1110mm / 1185mm
Box weight	620kg

Unit: mm

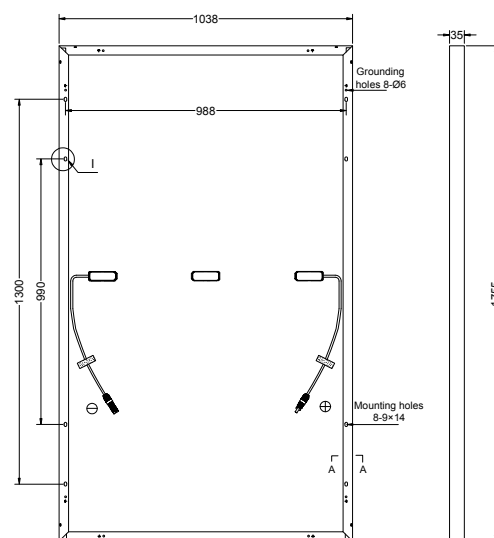

DETAIL I



SECTION A-A



Warning: Read the Installation and User Manual in its entirety before handling, installing and operating Yingli Solar modules.

Yingli Patners;



Belva Consult Limited
Tembwe Avenue- Mikocheni Area
P.O. Box 75212
Dar es Salaam, Tanzania
Tel:+255 22 2775 910 Fax: +255 22 2775 919
Mob: +255 754 270 400 Email: info@belva.co.tz

